


CM1200/CP1200 Configurazione

●○○
 ● = LED acceso
 ○ = LED spento
 ● = Variabile/flash LED
 Cicalino = indietro/cancella,
 # = Salva
 Timeout: 1 minuto

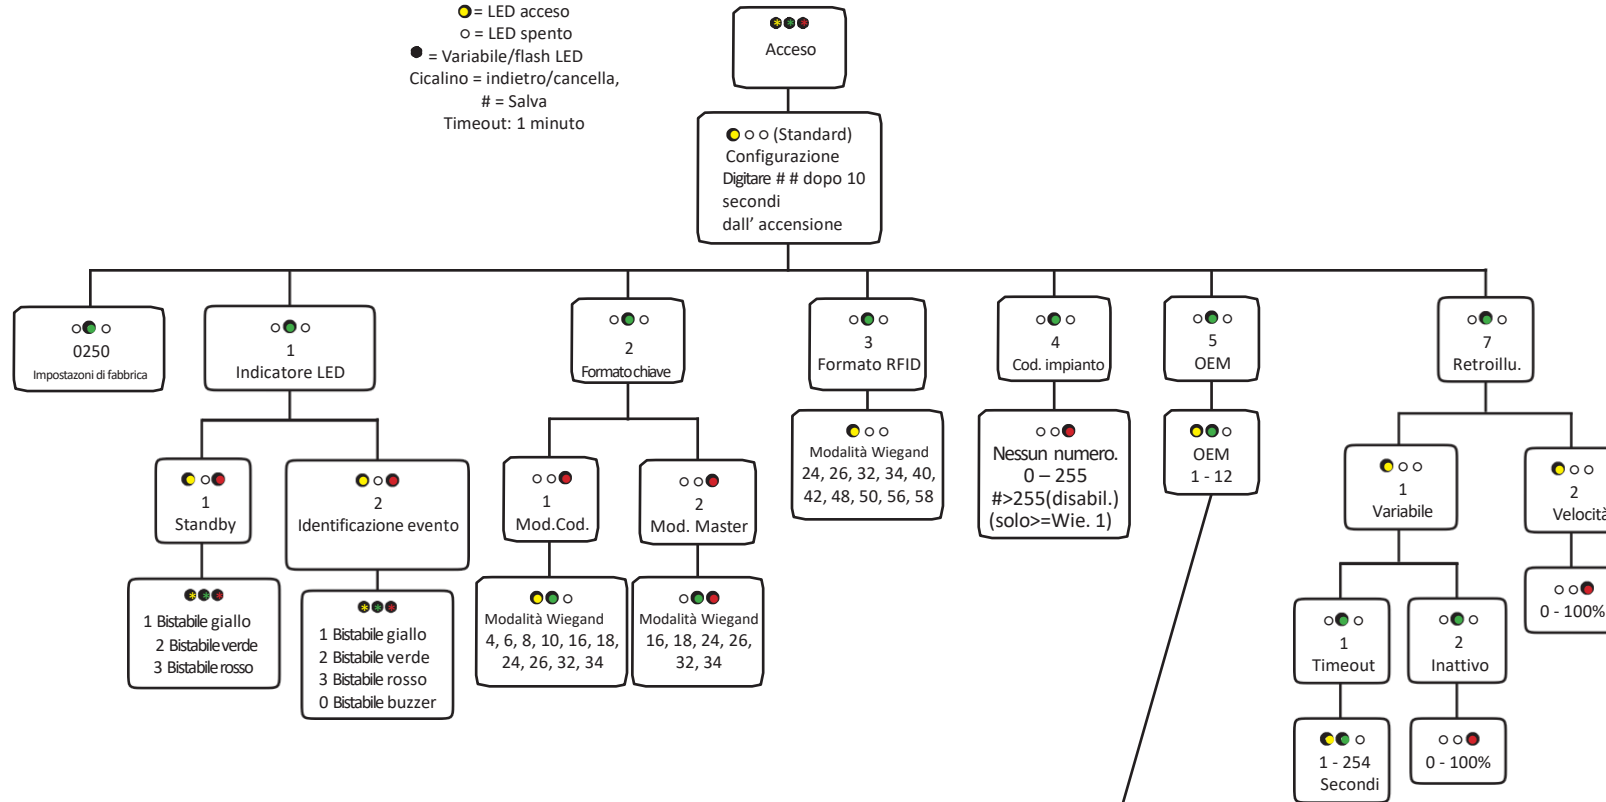

Sicurezza	OE		Imposta su
1	Conlan	✓	
2	NO	✓	
3	SP	✓	
4	AT	✓	
5	Paxton (W)	✓	
6	Sat		
7	Siemens		
8	Nedap		
9	Roger	✓	
10	S8600	✓	
11	Paxton (C.D.)	✓	